




SANDVIK UH312 WHEELED CONE UNIT

TECHNICAL SPECIFICATION

The UH312 is a secondary / tertiary crushing unit fully assembled on a single trailer frame. Featuring the highly reliable and productive CH440 cone crusher and new SA1854 four deck vibrating screen for increased screening accuracy and efficiency, this model has been designed to offer high-end productivity processing 1- 4 products at a low cost-per-tonne.

KEY BENEFITS

Reliability	<ul style="list-style-type: none">- Market leading Sandvik CH440 cone for strength and high performance- All onboard components are electrically driven giving reliability and minimal maintenance- Heavy duty chassis beams, strength analysis on structural parts and quality components for durability- Capable of operating in the most hostile environments
Productivity	<ul style="list-style-type: none">- Large feed opening in its class for increased intake flexibility which increases availability by avoiding bridging- Cone Crusher Unibody mainframe ensures optimal strength and less maintenance- Hydraulic cone Hydroset™ setting (CSS) and overload protection for maximum uptime- Constant Liner Performance (CLP) crushing chambers permits constant feed acceptance capability, increased output, high quality products and increased liner life- Choice of several chambers, throws and settings for a wide range of applications, enabling fine tuning to your specification and improved capacity- New SA screen with improved performance and screening accuracy, built for durability and ease of operation- Simple and efficient operation with soft starting crusher for trouble free operation
Cost of ownership	<ul style="list-style-type: none">- Low cost per tonne due to electric operation- Quick to set-up and easy to maintain, resulting in more uptime and higher productivity
Safety	<ul style="list-style-type: none">- New screen has been designed for enhanced safety with a protected steel coil spring and PU end cup as standard- Removable electrical control panel can be located on the ground during operation- Crusher mounted safety guards and multiple emergency stop buttons for safe operation- Maintenance platforms with handrails and access ladders provide excellent access for service and maintenance- Low emissions due to electrical operation, minimizing environmental impact
Support	<ul style="list-style-type: none">- Extensive global distributor and sales support network

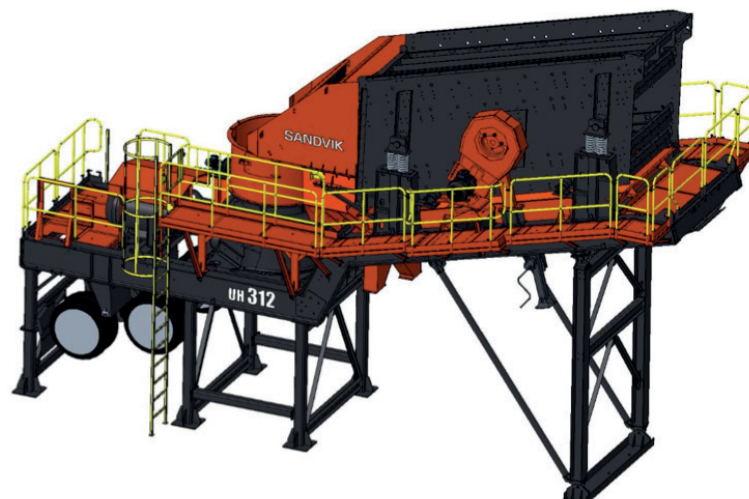



KEY SPECIFICATIONS	UH312
<hr/>	
Screen	
<hr/>	
Type	Sandvik SA1854 circular motion
Decks	4 deck
Size	1829 mm x 4877mm / 6' x 16'
Drive	Electric motor 15 kW
<hr/>	
Crusher	
<hr/>	
Type	Sandvik CH440 cone
Adj type	Hydraulic
CSS range	8 - 48 mm / 5/16" - 1 7/8" *
ASRi	Optional
Drive	Electric motor 220 kW, 4 pole
<hr/>	
Power system	
<hr/>	
All electrics are intended for connection to a mains supply	
<hr/>	
Total power	250.5 kW
Supply voltage	415-50 Hz / 440 V - 60 Hz / 3-phase AC
Control voltage	220V-50/60Hz/ 3-phase AC
<hr/>	
Running gear	2" / 3 1/2" King-pin, double-axle bogie with air-brakes and running lights. Tyres 10" x 20" - 16 ply

If powered by a genset at least 750 KVA is required

KEY SPECIFICATIONS	UH312
<hr/>	
Transport dimensions	
<hr/>	
Height	4.57 m / 15' 16"
Width	2.8 m / 9' 2"
Length	12.30 m / 40' 4"
Weight	42,800 kg / 94,357 lbs
<hr/>	
Operating dimensions	
<hr/>	
Height	7.94 m / 26' 6"
Width	4.34 m / 14' 3"
Length	11.70 m / 38' 7"
<hr/>	
Performance	
<hr/>	
Max feed size	215 mm / 8.5"
Capacity (up to)	300 mtph / 330 stph *

Note. All weights and dimensions are for standard units only

STANDARD SPECIFICATION

Self contained electrical switchgear cabinet with soft starter
Maintenance platform with handrails and access ladder
Safety guards to crusher drives
Emergency stop buttons
2" / 3 1/2" King-pin, double-axle bogie with air-brakes and
running lights. Tyres 10" x 20" - 16 ply
Trailer suitable for 24 V supply

For option availability please speak with your local Sandvik representative

* Application specific. Please contact a Sandvik representative for clarification on specifications and options
Sandvik reserves the right to make changes to the information on this data sheet without prior notification to users

HOME.SANDVIK