




SANDVIK UV210 WHEELED VSI UNIT

TECHNICAL SPECIFICATION

The UV210 is a tertiary crushing unit fully assembled on a single trailer frame purpose designed for the aggregates industry. Featuring the CV217 Vertical Shaft Impactor (VSI) crusher and new SA1853 triple deck vibrating screen for increased screening accuracy and efficiency, it has been designed to offer a highly versatile, high-end capacity plant capable of processing 1-3 products of premium shape at a low cost-per-tonne operation.

KEY BENEFITS

Reliability	<ul style="list-style-type: none">- Market leading CV217 VSI impactor for reliability and high performance- All onboard components are electrically driven giving reliability and minimal maintenance- Heavy duty chassis beams, strength analysis on structural parts and quality components for durability- Capable of operating in the most hostile environments
Productivity	<ul style="list-style-type: none">- Sandvik VSI technology renowned for high capacity production and cubical shape at a consistent quality- Produces shaped aggregates and sand of a consistent high quality through controlled product grading- Three-port patented rotor design and Bi-Flow™ technique enable consistent material flow and high throughput- Capable of processing hard and abrasive rocks to soft, moist or even sticky materials. Quick and easy replacement of wear parts, which keeps your equipment productive with minimal downtime- Three-port patented rotor design and Bi-Flow™ technique enable consistent material flow and high throughput- New SA screen with improved performance and screening accuracy, built for durability and ease of operation- Simple and efficient operation with soft starting crusher for trouble free operation
Cost of ownership	<ul style="list-style-type: none">- Low cost per tonne due to electric operation- Patented 3-port rotor and Bi-Flow™ technique result in low consumption of wear parts due to rock-on-rock crushing, and thereby lower running costs- Quick to set-up and easy to maintain, resulting in more uptime and higher productivity
Safety	<ul style="list-style-type: none">- Unique key trapped system to ensure safe inspection after the rotor has stopped turning- New screen has been designed for enhanced safety with a protected steel coil spring and PU end cup as standard- Removable electrical control panel can be located on the ground during operation- Maintenance platforms with handrails and access ladders provide excellent access for service and maintenance- Low emissions due to electrical operation, minimizing environmental impact
Support	<ul style="list-style-type: none">- Extensive global distributor and sales support network

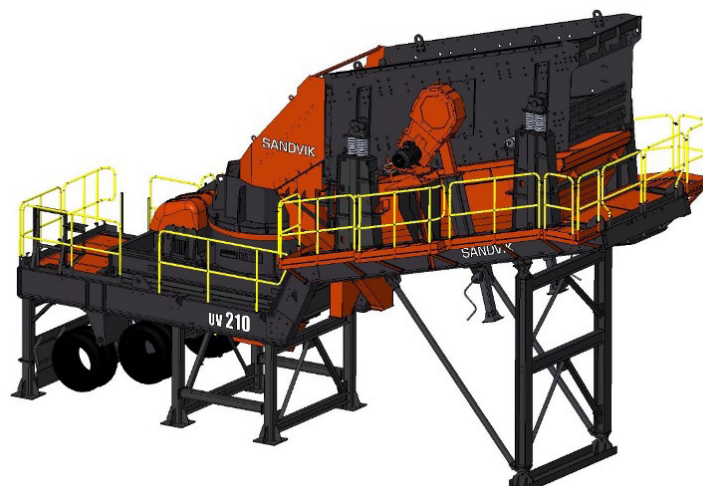



KEY SPECIFICATIONS	UV210
Screen	
Type	Sandvik SA1853 circular motion
Decks	3 deck
Size	1829 mm x 4877mm / 6' x 16'
Screening area	5.92 m ² / 278.78 ft ²
Drive	Electric motor 15 kW
Crusher	
Type	Sandvik CV217 VSI
Feed size	50 mm / 2"
Standard speed	51 M / sec
Drive	Electric motor 185 kW
Power system	
All electrics are intended for connection to a mains supply	
Total power	200 kW
Supply voltage	415-50 Hz/440V-60 Hz / 3-phase AC
Control voltage	220 V-50 /60Hz/ 3-phase AC
Running gear	
	2" / 31 / 2" King-pin, double-axle bogie with air-brakes and running lights. Tyres 10" x 20" - 16 ply

KEY SPECIFICATIONS	UV210
Transport dimensions	
Height	5.00 m / 16' 5"
Width	2.80 m / 9' 2"
Length	12.30 m / 40' 4"
Weight	33,800 kg / 74,516 lbs
Operating dimensions	
Height	7.77 m / 25' 6"
Width	4.82 m / 15' 10"
Length	12.30 m / 40' 4"
Performance	
Max feed size	50 mm / 2"
Capacity (up to)	185 mtp/h / 200 stph *

Note. All weights and dimensions are for standard units only

STANDARD SPECIFICATION

Self contained electrical switchgear cabinet with soft starter
 Maintenance platform with handrails and access ladder
 Safety guards to crusher drives
 Emergency stop buttons
 2" / 31 / 2" King-pin, double-axle bogie with air-brakes and running lights. Tyres 10" x 20" - 16 ply
 Trailer suitable for 24 V supply

For option availability please speak with your local Sandvik representative

* Application specific. Please contact a Sandvik representative for clarification on specifications and options
 Sandvik reserves the right to make changes to the information on this data sheet without prior notification to users