
Sandvik BR1655i series



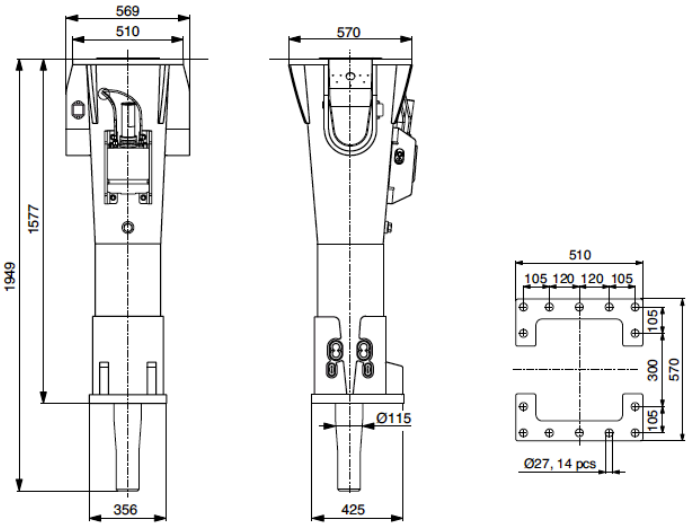

Optimum productivity with every blow
Harness the power of data to maximize the hammer's uptime and performance.

Factory-installed RD3
Remote monitoring device for superior fleet management

Best power-weight ratio in the market
Reduced fuel usage for optimum productivity and more savings in money.

Durable like no other
Extreme durability for any application to ensure longest life span.

Product specifications	
Minimum working weight, flange mounted, kg (lb)	1080 (2380)
Impact rate, bpm	500-920
Operating pressure, bar (psi)	135-145 (1960-2105)
Pressure relief, max bar (psi)	240 (3480)
Oil flow range, l/min (gal/min)	90-130 (23.8-34.3)
Back pressure, max bar (psi)	10 (145)
Input power, kW (hp)	31 (42)
Tool diameter, mm (in)	115 (4.53)
Miniexcavator weight, allowed range t (lb)	12-20 (26500-44100
Skid steer, robot weight, allowed range t (lb)	-
Noise level, measured sound power level, LWA dB	123
Noise level, guaranteed sound power level, LWA dB	137

Sandvik Mining and Rock Solutions reserves the right to make changes to the information on this data sheet without prior notification to users. Please contact a Sandvik representative for clarification on specifications and options.

Sandvik Mining and Rock Solutions © 2024.
Legal notice: All trademarks and logos appearing in this material are owned by the Sandvik Group of companies, unless otherwise specifically indicated.

SANDVIK